LUXX Light + Retail Technology

eShelf[®] ESP65-W

47.1" Digital Stretch Screen



Engaging shelf signage.



The 47.1" Digital Stretch Screen is a sleek, high-definition display designed for 24/7 operation, making it perfect for continuous use in retail, hospitality, and other commercial settings. This stand-alone unit supports independent playback, allowing you to effortlessly display content without needing a network connection. Ideal for digital signage applications that require clear, eye-catching visuals in compact spaces.

Whether you're showcasing promotions, menus, or product information, this durable and energy-efficient display delivers sharp, vibrant content around the clock.

Compatible



Compatible with a broad range of input voltages (15-36V DC), offering businesses flexibility in installation across different regions.

Convenient



This stand-alone unit offers hassle-free operation, allowing you to play content directly without the need for a network or external connections.

Reliable



Supports 24/7 continuous operation, ensuring your content stays visible and engaging around the clock.

Let your message stand out

With a vibrant digital display.

Panel	
Size	47.1"
Active area	1196.16(H) x 49.84(V) mm
Resolution	3840(V) x 160(H)
Backlight	LED
Lifespan	50000 hours
Viewing angle	89/89/89/89
Contrast	1000: 1
Frequency	60 Hz
Display color	16.7M

systems	
CPU	T972 Quad core ARM Cortex-A55 1.9GHz
RAM	2G (4G/8G optional)
ROM	16G EMMC (32G/64G EMMC optional)
Memory extension	128G TF, TF Card extension with the highest support for 128GB
Networks	Built-in WIFI (default 2.4G single frequency, configurable to 2.4G/5G dual frequency)
Bluetooth	Bluetooth V4.2
Interface	1*Micro USB (OTG), 1*TF Card, 1*USB-C Power Input (DC15-36V). Must match with our special adapter for power supply
OS	Android 9.0

Mechanical Packaging

Dimension	1214.8 x 68.8 x 25.0mm
N.W	≤ 3KG
Packing Dimension (5 Pcs/CTN)	1300 x 380 x 150mm
G.W. (5 Pcs/CTN)	17.6KG

Accessories

Systams

Power adapter, Mounting bracket, OTG Optional cable

Power

Power consumption	≤ 35W
Voltage	DC 15-36V

Environment

Working environment	Temperature: 0°C ~ 50°C Humidity: 10% ~ 85% Atmospheric Pressure: 86KPa ~ 104KPa
Storage environment	Temperature: -20°C ~ 60°C Humidity: 5% ~ 95% Atmospheric Pressure: 86kPa ~ 104kPa

Warranty

Supported Media Formats

- · Audio MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP formats
- Video Multi-format 1080P 60fps video decoding (H.265, H.264, VC-1, MPEG-1/2/4, VP8), 1080P video encoding, supports H.264, VP8
- · Picture Supports browsing of various image formats such as JPG, BMP, PNG and supports rotation/slideshow/image enlargement functions

Note: LCD screens, including eShelf, may experience image retention or burn-in without effective content management.

What is Image Retention?

Image retention refers to any image that "sticks" on a screen, even when the content changes. It usually appears as a faint ghost that fades after a moment.

What is Image Burn-In?

Burn-in is a form of image retention that lasts much longer. It is a visible mark that remains, no matter what you are watching or doing.

Causes of Burn-In

- · Videos that have a static logo, such as product logos, can leave a burn-in if displayed for a prolonged period
- · Pausing a video and leaving the eShelf on for prolonged periods

Avoiding Burn-In


To prevent eShelf burn-in,

- · AVOID displaying static images or videos that have a static logo on eShelf
- ALWAYS incorporate dynamic content to maintain eShelf's quality over time.









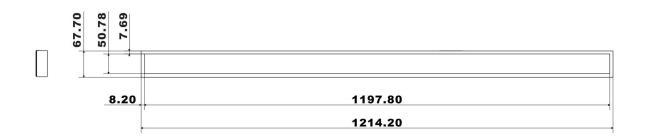

USB-C Power Input

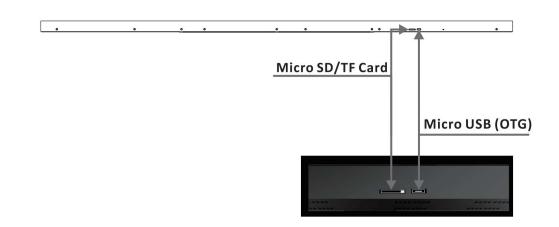

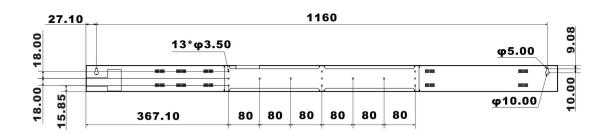

eShelf[®] **ESP65-W** V1.0-2024-12-OR

