

eShelf[®]

ESP50A-W

35" Digital Stretch Screen

(LUXX-ESP50A-400-W)




Engaging shelf signage.



The 35" Digital Stretch Screen is a sleek, high-definition display designed for 24/7 operation, making it perfect for continuous use in retail, hospitality, and other commercial settings. This stand-alone unit supports independent playback, allowing you to effortlessly display content without needing a network connection. Ideal for digital signage applications that require clear, eye-catching visuals in compact spaces.

Whether you're showcasing promotions, menus, or product information, this durable and energy-efficient display delivers sharp, vibrant content around the clock.

Compatible



Compatible with a broad range of input voltages (15-36V DC), offering businesses flexibility in installation across different regions.

Convenient



This stand-alone unit offers hassle-free operation, allowing you to play content directly without the need for a network or external connections.


Reliable



Supports 24/7 continuous operation, ensuring your content stays visible and engaging around the clock.

Let your message stand out

With a vibrant digital display.

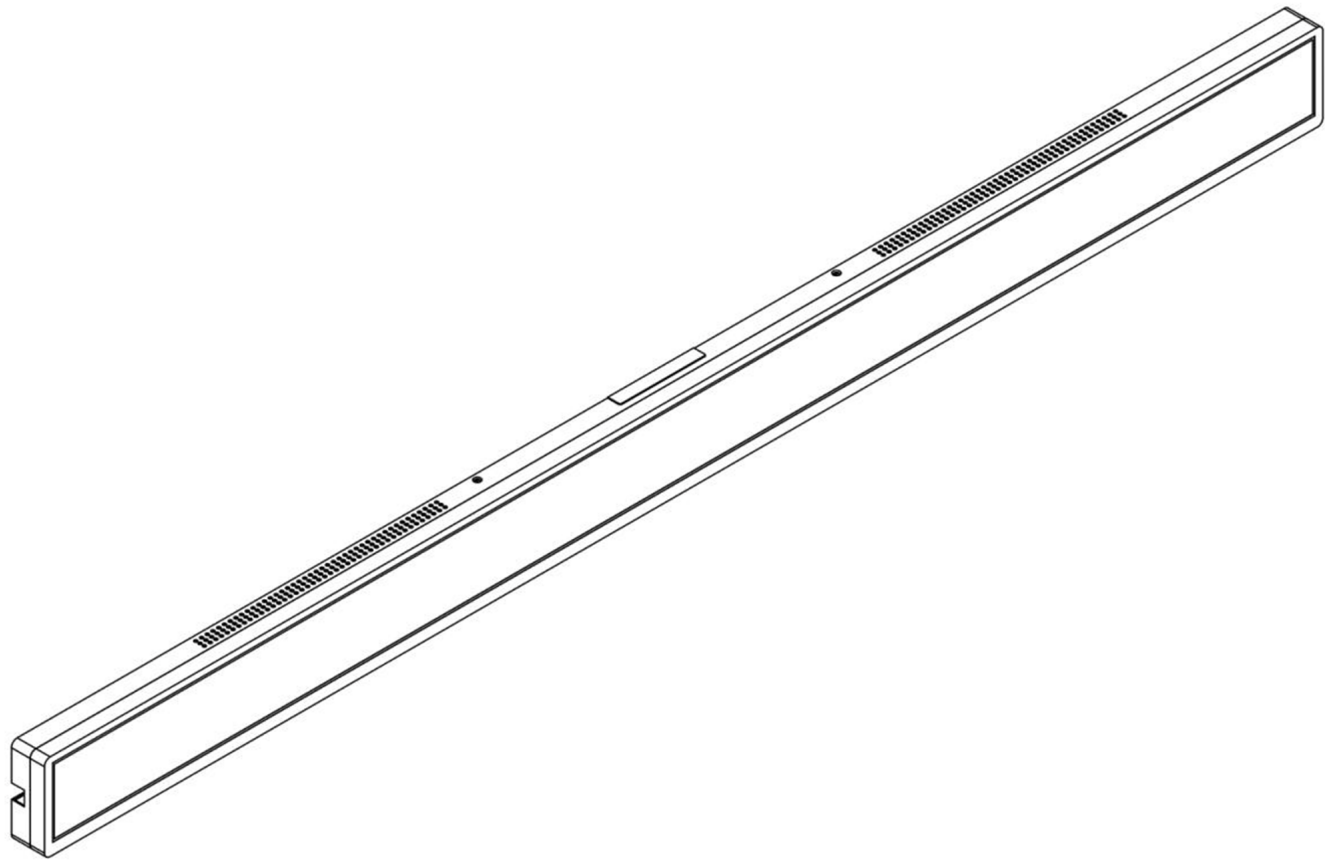

LCD Screen	
Size	35"
Dimension	891.6 x 60.4 x 23.0mm
Active area	878.4(H) x 48.19(V) mm
Resolution	3840(V) x 200(H)
Backlight	LED
Brightness (nits)	400cd/m²
Lifespan	30000 hours
Viewing angle	178°(V) x 178°(H)
Contrast	1000: 1
Frequency	60 Hz
Display color	1.07G
Response time	8 ms

Systems	
CPU	T972 Quad core ARM Cortex-A55 1.9GHz
RAM	2G (4G/8G optional)
ROM	16G EMMC (32G/64G EMMC optional)
Memory extension	128G TF, TF Card extension with the highest support for 128GB
Networks	Built-in WIFI (default 2.4G single frequency, configurable to 2.4G/5G dual frequency)
Bluetooth	Bluetooth V4.2
Interface	1*micro USB (OTG), 1*TF card, 1*USB-C Power Input (DC15-36V). Must match with our special adapter for power supply
OS	Android 9.0

Packing Info	
N.W	≤ 1.5KG
Packing Dimension (5 Pcs/CTN)	1120 x 320 x 140mm
G.W.	7.55KG

Accessories	
Optional	Power adapter, Mounting bracket, OTC cable

Power	
Power consumption	≤ 18W
Voltage	DC 15-36V

Environment	
Working environment	Temperature: 0°C~50°C Humidity: 10%~85% Atmospheric Pressure: 86KPa~104KPa
Storage environment	Temperature: -20°C~60°C Humidity: 5%~95% Atmospheric Pressure: 86kPa~104kPa


Warranty	
Year	1Y (more options on request)

Supported Media Formats	
<ul style="list-style-type: none">Audio - MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP formatsVideo - Multi-format 1080P 60fps video decoding (H.265, H.264, VC-1, MPEG-1/2/4, VP8), 1080P video encoding, supports H.264, VP8Picture - Supports browsing of various image formats such as JPG, BMP, PNG and supports rotation/slideshow/image enlargement functions	

Note: LCD screens, including eShelf, may experience image retention or burn-in without effective content management.

<p>What is Image Retention?</p> <p>Image retention refers to any image that "sticks" on a screen, even when the content changes. It usually appears as a faint ghost that fades after a moment.</p>
<p>What is Image Burn-In?</p> <p>Burn-in is a form of image retention that lasts much longer. It is a visible mark that remains, no matter what you are watching or doing.</p>
<p>Causes of Burn-In</p> <ul style="list-style-type: none">Videos that have a static logo, such as product logos, can leave a burn-in if displayed for a prolonged periodPausing a video and leaving the eShelf on for prolonged periods
<p>Avoiding Burn-In</p> <p>To prevent eShelf burn-in,</p> <ul style="list-style-type: none">AVOID displaying static images or videos that have a static logo on eShelfALWAYS incorporate dynamic content to maintain eShelf's quality over time.


eShelf[®]
ESP50A-W
V1.1-2025-03-OR

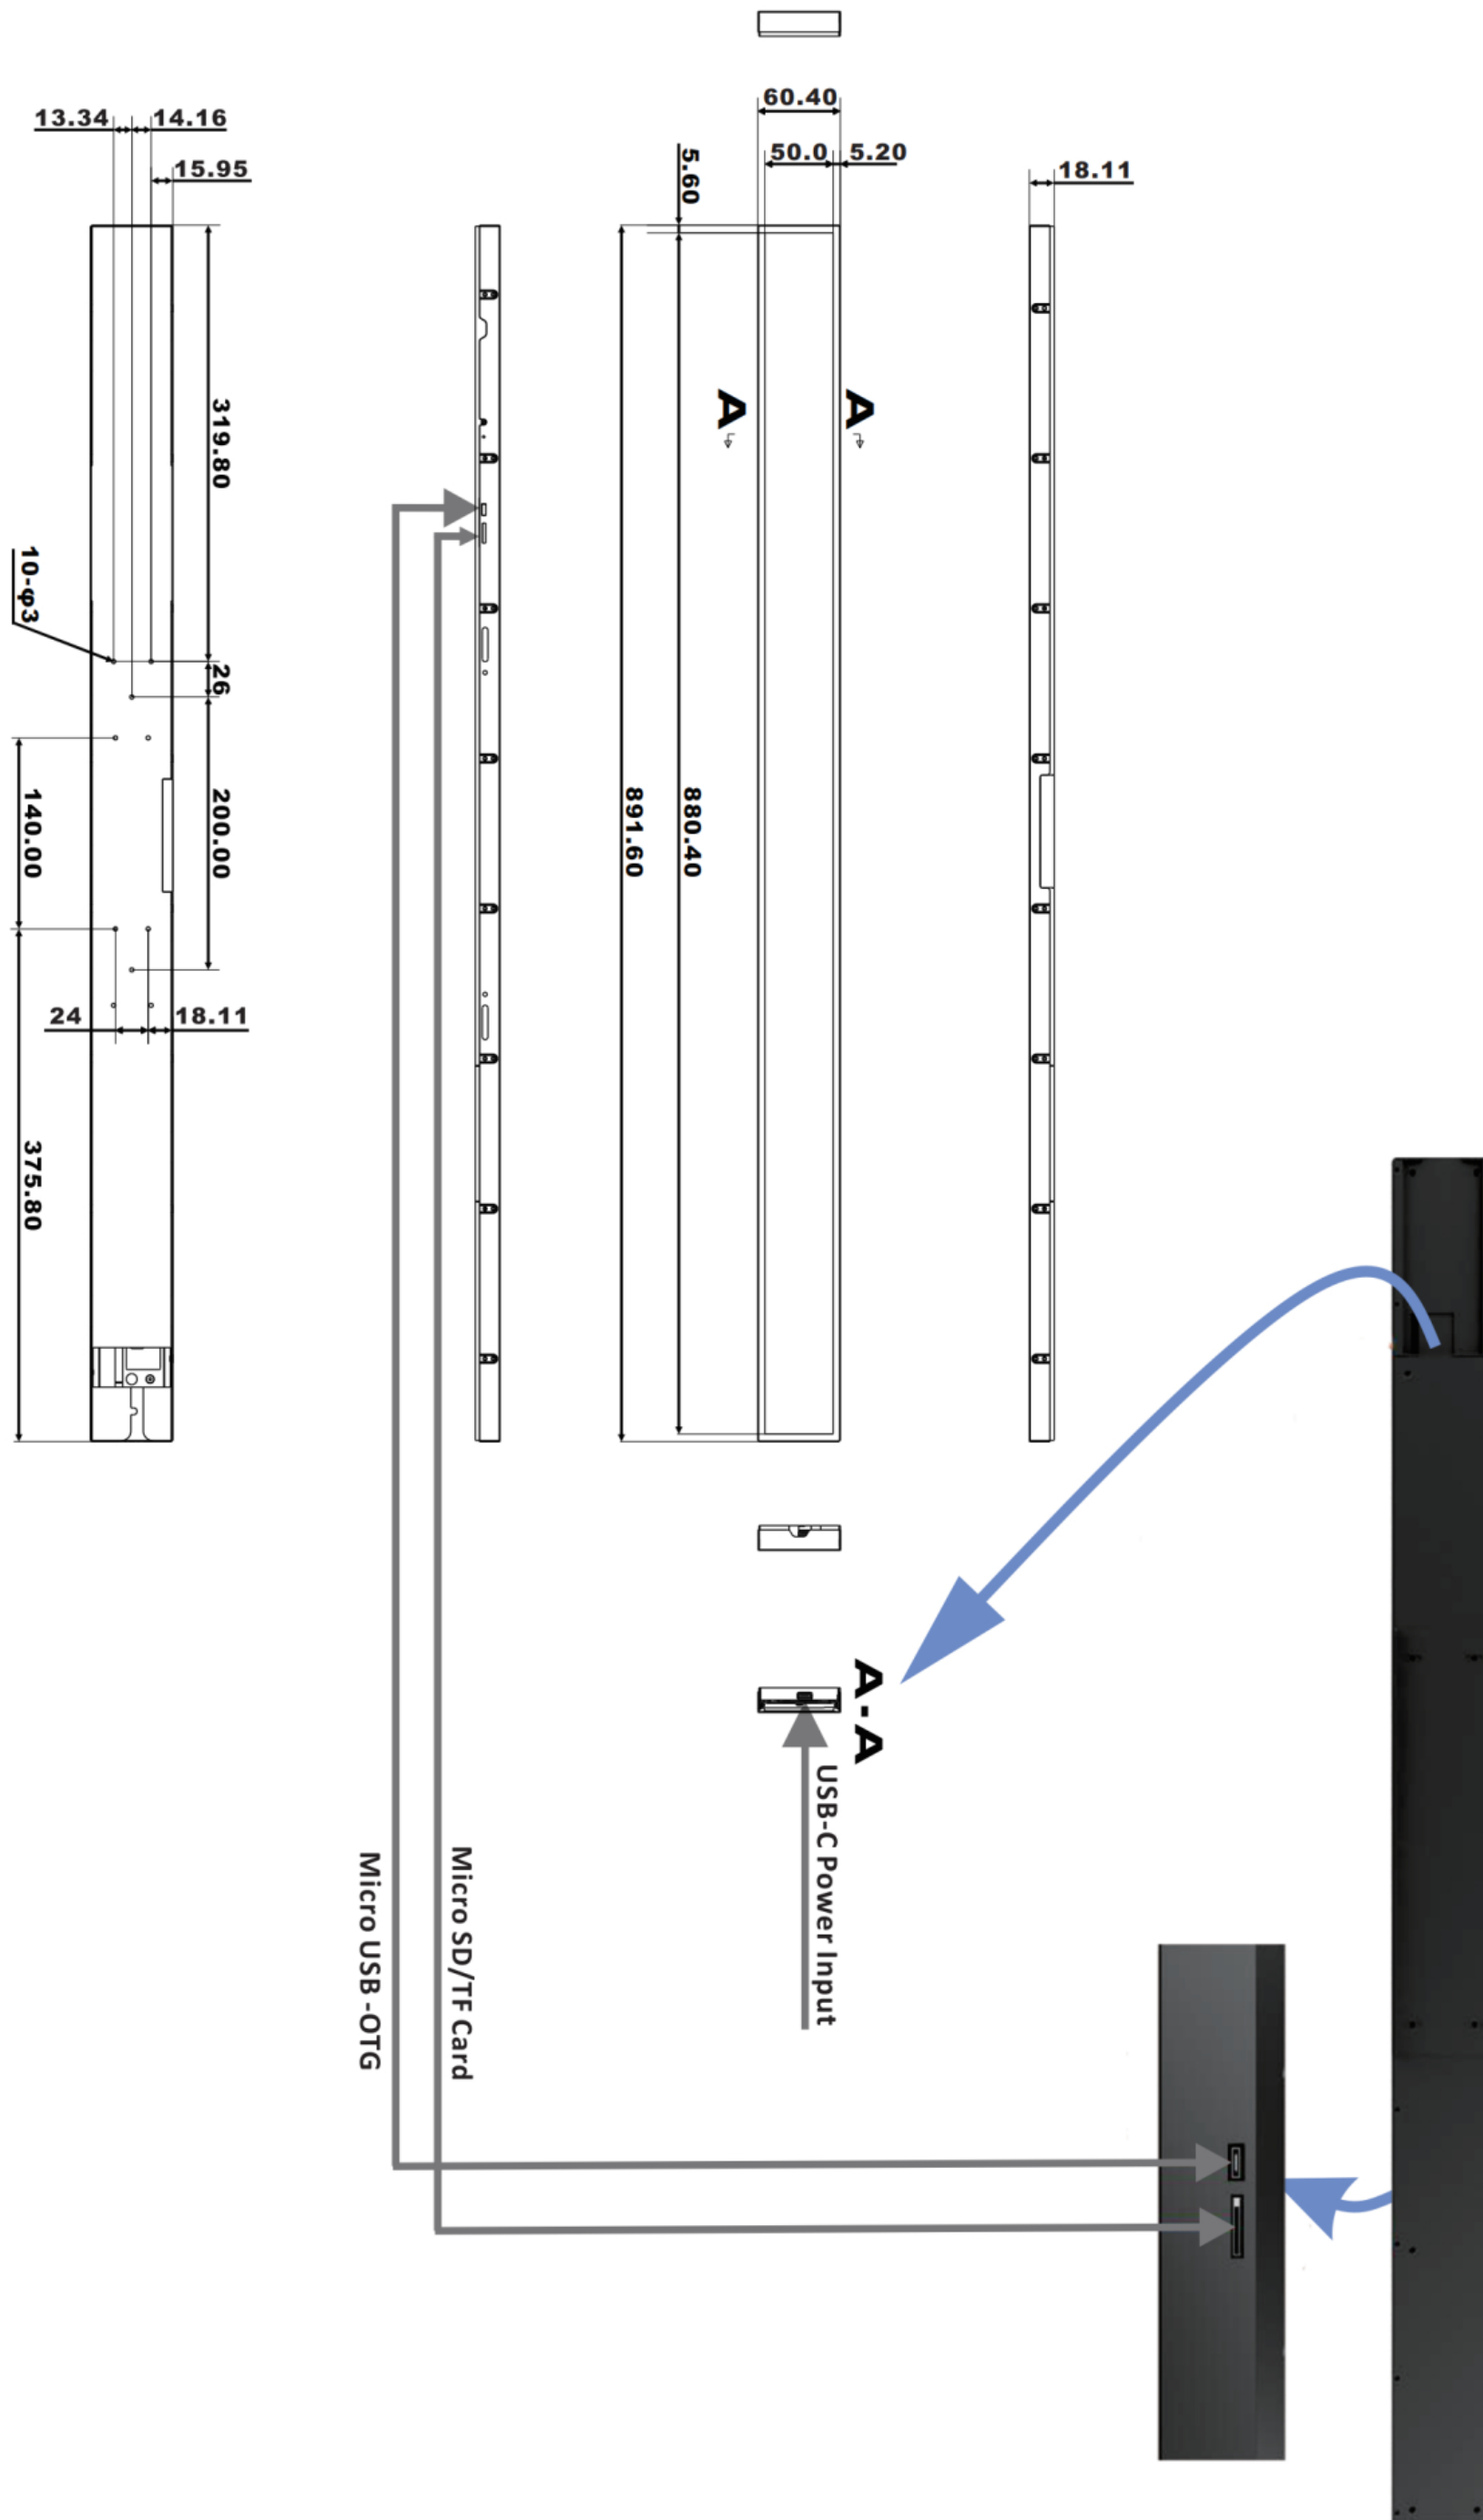

eShelf[®]

Item No.: LUXX-ESP50A-400-W
Input Voltage: 15-36V DC
Power: Max.18W
Screen Size: 35 inch
Active Area: 878.4 x 48.19mm
Resolution: 3840 X 200px
System: Andriod 9.0
Radio: 2.4GHz 17.72dBm Max.

LUXX



LUXX Light Technology (HK) Ltd.
www.luxx.com